

U.S. Application No.
Unknown

International Application No.
PCT/AU00/01065

3-12-00
JC07 Rec'd PCT/PTO 08 MAR 2002
Attorney Docket No.
FBRIC29.001APC

Date: March 8, 2002

10/070914 Page 1

**TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 USC 371**

International Application No.: PCT/AU00/01065
International Filing Date: 8 September 2000
Priority Date Claimed: 10 September 1999
Title of Invention: ELECTROPHORESIS APPARATUS AND A METHOD OF USING THE
SAME
Applicant(s) for DO/EO/US: Ben Herbert

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. ☒ This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 USC 371(c)(2))
 - a) ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b) ☒ has been transmitted by the International Bureau.
 - c) ☐ a copy of Form PCT/1B/308 is enclosed.
 - d) ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 USC 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
 - a) ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b) ☐ have been transmitted by the International Bureau.
 - c) ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d) ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 USC 371(c)(4)).
10. ☐ A copy of the International Preliminary Examination Report with any annexes thereto, such as any amendments made under PCT Article 34.

Date: March 8, 2002

Page 2

11. ☐ A translation of the annexes, such as any amendments made under PCT Article 34, to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☒ International Search Report.
16. ☐ A power of attorney and/or address letter.
17. ☒ International Application as published with seven (7) sheets of drawings.
18. ☐ The present application qualifies for small entity status under 37 C.F.R. § 1.27.
19. ☒ A return prepaid postcard.
20. ☒ The following fees are submitted:

				FEES
BASIC FEE				\$1,040
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	23 - 20 =	3 ×	\$18	\$ 54
Independent Claims	3 - 3 =	0 ×	\$84	\$0
Multiple dependent claims(s) (if applicable)			\$280	\$0
TOTAL OF ABOVE CALCULATIONS				\$1094
Reduction by 1/2 for filing by small entity (if applicable). Verified Small Entity statement must also be filed. (NOTE 37 CFR 1.9, 1.27, 1.28)				\$0
TOTAL NATIONAL FEE				\$1094
TOTAL FEES ENCLOSED				\$1094
amount to be refunded:				\$0
amount to be charged:				\$0

21. ☒ A check in the amount of \$1094.00 to cover the above fees is enclosed.

10020946 00000000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant	:	Ben Herbert)
)
Appl. No.	:	Unknown)
PCT Appl No.	:	WO 01/20315 A1)
)
Filed	:	Herewith)
)
For	:	ELECTROPHORESIS)
		APPARATUS AND A)
		METHOD OF USING SAME)

PRELIMINARY AMENDMENT

United States Patent and Trademark Office
P.O. Box 2327
Arlington, VA 22202

Dear Sir:

Prior to examination, please amend the above-referenced application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

1. An apparatus for rehydrating and for performing electrophoresis on a gel strip including:

a tray defining at least one trough configured to receive a gel strip, said trough defining a centrally located rehydration area and an electrode area disposed either side of the rehydration area;

means for delimiting the rehydration area of the trough from the electrode area;
and

electrode means including contact points adapted to contact either the gel strip in the electrode areas near the first and second end of the gel strip or a conducting or current carrying electrode bridge material which is in contact with the gel strip in the electrode

areas, the electrode means being adapted to be connected to a means for supplying an electric current for imposing an electric potential in the strip between the electrodes.

2. (Amended) An apparatus as claimed in Claim 1, wherein the means for delimiting the rehydration area of the trough from the electrode area include walls extending laterally across the width of the trough and an air gap defined between each electrode means and the wall adjacent said electrode means.

3. (Amended) An apparatus as claimed in Claim 1, wherein two spaced apart parallel walls extend across the trough defining a gap there between.

4. (Amended) An apparatus as claimed in claim 3 wherein a part of the gel strip in the rehydration area of the trough adjacent the delimiting wall contacts a conducting/current carrying, electrode bridge.

5. An apparatus as claimed in claim 4 wherein the electrode bridges comprise an absorbent material wetted with an electrically conducting liquid.

6. An apparatus as claimed in claim 5 wherein the absorbent material is paper.

7. (Amended) An apparatus as claimed in Claim 1 wherein the electrode area is deeper than the rehydration area.

8. (Amended) An apparatus as claimed in Claim 1, wherein a laterally extending channel is defined in a floor of the trough.

9. (Amended) An apparatus as claimed in Claim 1, wherein the trough does not include embedded electrodes and the electrodes contact the electrode bridge material from above.

10. (Amended) An apparatus as claimed in Claim 1, wherein the tray includes a dry IPG gel strip and dry electrode bridge material located in place in the trough.

11. (Amended) An apparatus as claimed in Claim 1 further including pressure applying means which rest on the gel strip where the strip overlaps the electrode bridge material to ensure a good electrical contact between the gel strip and the electrode bridge material.

12. (Amended) An apparatus as claimed in Claim 1, wherein the tray defines a plurality of substantially parallel troughs.

14. (Amended) A method of rehydrating and performing electrophoresis on a gel strip comprising the steps of:

providing a tray defining at least one trough with a gel strip, located in said trough, the trough defining a centrally located rehydration area and an electrode area disposed on at least one side of the centrally located rehydration area in which an absorbent electrode bridge is provided, the trough including means for delimiting the rehydration area of the trough from the electrode area;

wetting the bridges with an electrically conducting liquid;

adding rehydration liquid, containing a sample to be separated by electrophoresis into the centrally located rehydration area of the trough;

inserting a dry gel strip into the trough if a gel strip is not already present in the trough, the gel strip being longer than the rehydration area so that its ends rest on the electrode bridges;

applying relatively low voltage across the gel strip during a first period in which rehydration of the gel strip occurs;

subsequently applying a relatively higher voltage to perform electrophoresis on the sample

15. (Amended) The method of claim 14 wherein the sample is a mixture of macromolecules selected from the group consisting of protein samples containing DNA, RNA, amino acids or other components which can be separated by electrophoresis.

16. (New) An apparatus for performing electrophoresis on a gel strip comprising:

a tray defining a rehydration trough that receives rehydration fluid containing macromolecules and an electrode trough, wherein the rehydration trough and the electrode trough are separated from each other so as to inhibit the flow of rehydration fluid from the rehydration trough to the electrode trough;

a gel strip that is positioned within the rehydration trough;

an electrode assembly positioned within the electrode area wherein the electrode assembly provides current which is supplied to the gel strip wherein the electrode assembly is positioned within the electrode area of the trough such that contact of the macromolecules in the rehydration fluid and the electrode assembly is inhibited when the rehydration fluid is positioned within the rehydration trough.

17. (New) The apparatus of Claim 16, wherein a wall is interposed between the rehydration trough and the electrode trough of the tray.

18. (New) The apparatus of Claim 17, wherein the electrode assembly includes an electrode bridge material positioned within the electrode trough such that an air gap is interposed between the electrode bride material and the wall interposed between the rehydration trough and the electrode trough of the tray.

19. (New) The apparatus of Claim 18, wherein the gel strip is positioned within the rehydration trough such that a portion of the gel strip extends to contact the electrode assembly adjacent the electrode bridge material.

20. (New) The apparatus of Claim 19, wherein the electrode assembly further includes an electrode that contacts the electrode bridge material from a position above the electrode bridge material and the floor of the electrode trough.

21. (New) The apparatus of Claim 20, wherein the gel strip comprises a dry gel strip that is hydrated by the rehydration fluid and the electrode bridge material initially comprises a dry electrode bridge material that must be hydrated.

22. (New) The apparatus of Claim 17, wherein the floor of the rehydration trough includes a laterally extending channel positioned therein.

23. (New) The apparatus of Claim 22, wherein the floor of the rehydration trough is flat and includes sloped ends which slope upwards towards the wall interposed between the rehydration trough and the electrode trough.

24. (New) The apparatus of Claim 22, wherein the floor of the rehydration channel is curved along the base of its length.

REMARKS

Attached hereto is a marked-up version of the changes made to the application by the current amendment. The attached page is captioned "**Version with Markings to Show Changes Made**"; additions are shown as underlined and deletions are shown [**bracketed**].

Respectfully submitted,

KNOBBE, MARTENS, OLSON & BEAR, LLP

Dated: _____

3/8/02

By: _____

Michael H. Trenholm
Registration No. 37,743
Attorney of Record
620 Newport Center Drive
Sixteenth Floor
Newport Beach, CA 92660
(909) 781-9231

Version with Markings to Show Changes Made

IN THE CLAIMS:

The claims have been amended as follows:

2. (Amended) An apparatus as claimed in [any preceding claim] Claim 1, wherein the means for delimiting the rehydration area of the trough from the electrode area include walls extending laterally across the width of the trough and an air gap defined between each electrode means and the wall adjacent said electrode means.

3. (Amended) An apparatus as claimed in [any preceding claim] Claim 1, wherein two spaced apart parallel walls extend across the trough defining a gap there between.

4. (Amended) An apparatus as claimed in claim [2 or] 3 wherein a part of the gel strip in the rehydration area of the trough adjacent the delimiting wall contacts a conducting/current carrying, electrode bridge.

7. (Amended) An apparatus as claimed in [any preceding claim] Claim 1 wherein the electrode area is deeper than the rehydration area.

8. (Amended) An apparatus as claimed in [any preceding claim] Claim 1, wherein a laterally extending channel is defined in a floor of the [groove] trough.

9. (Amended) An apparatus as claimed in [any preceding claim] Claim 1, wherein the trough does not include embedded electrodes and the electrodes contact the electrode bridge material from above.

10. (Amended) An apparatus as claimed in [any one of claims 1 to 8] Claim 1, wherein the tray includes a dry IPG gel strip and dry electrode bridge material located in place in the trough.

11. (Amended) An apparatus as claimed in [any preceding claim] Claim 1 further including pressure applying means which rest on the gel strip where the strip overlaps the electrode bridge material to ensure a good electrical contact between the gel strip and the electrode bridge material.

12. (Amended) An apparatus as claimed in [any preceding claim] Claim 1, wherein the tray defines a plurality of substantially parallel troughs.

14. (Amended) A method of rehydrating and performing electrophoresis on a gel strip comprising the steps of:

providing a tray defining at least one trough with a gel strip, located in said trough, the trough defining a centrally located rehydration area and an electrode area disposed on at least one [either] side of the [electrode area] centrally located rehydration area in which an absorbent electrode bridge is provided, the trough including means for delimiting the rehydration area of the trough from the electrode area;

wetting the bridges with an electrically conducting liquid;

adding rehydration liquid, containing a sample to be separated by electrophoresis into the centrally located rehydration area of the trough;

inserting a dry gel strip into the trough if a gel strip is not already present in the trough, the gel strip being longer than the rehydration area so that its ends rest on the electrode bridges;

applying relatively low voltage across the gel strip [the] during a first period in which rehydration of the gel strip occurs;

subsequently applying a relatively higher voltage to perform electrophoresis on the sample

15. (Amended) The method of claim 14 wherein the sample is a mixture of macromolecules selected from the group consisting of protein samples containing DNA, RNA, amino acids or other components which can be separated by electrophoresis [may be used].

[illegible]

This invention relates to an electrophoresis apparatus and to a method of using the same for separating biomolecules by electrophoresis.

Background of the Invention

Two-dimensional electrophoresis is the preferred method for separating proteins from complex mixtures such as tissue samples, bacteria or plant material. Typically the proteins are separated in the first dimension using an electrophoresis gel with an immobilised pH gradient (IPG). These gels are commercially available and are usually supplied as dry gel strips bonded to a plastic backing sheet. Before the separation takes place the gel must be rehydrated with an appropriate liquid, in which it is ideal to have the protein sample dissolved. The most common embodiment of this approach is to allow the rehydration to occur passively, in a tray comprising a plurality of troughs, until the liquid in each trough has fully rehydrated the IPG gel strip in that trough. This requires that care is taken in selecting the correct volume of rehydration liquid to match the capacity of the IPG gel strip. If too little rehydration liquid is added the IPG will under-rehydrate and the separation will be compromised. Similarly, if too much rehydration liquid is added and some of that liquid is not taken up by the IPG gel strip then proteins are lost in the liquid which is not taken up into the gel. Typically, high molecular weight proteins are preferentially lost in this process.

To overcome this drawback with passive rehydration some groups have advocated the use of rehydration trays with electrodes embedded in the troughs. The electrodes are used to provide a voltage ($\sim 50\text{V}$) during the rehydration process. This electric field causes 'active' uptake of the proteins into the IPG gel matrix and results in more proteins entering the gel, especially high molecular weight proteins. However, if the rehydration solution comes in contact with both electrodes during the rehydration process, then the dissolved proteins may undergo electrophoretic transport to the electrodes in the free solution. If this occurs, a significant proportion of the proteins of the sample do not separate in the IPG because the sample proteins are transported to the electrode and then precipitate there. The

proteins which are lost in this process represent all molecular weights, not only high molecular weight proteins.

The present invention aims to provide an IPG gel strip rehydration tray that allows active rehydration to be done without the free rehydration solution coming into contact with the electrodes, thus preventing the electrophoretic transport of the proteins to the electrodes.

Disclosure of Invention

In a first aspect of the present invention there is provided an apparatus for rehydrating and for performing electrophoresis on a gel strip including:

- (a) a tray defining at least one trough configured to receive a gel strip, said trough defining a centrally located rehydration area and an electrode area disposed either side of the rehydration area;
- (b) means for delimiting the rehydration area of the trough from the electrode area; and
- (c) electrode means including contact points adapted to contact either the gel strip in the electrode areas near the first and second end of the gel or a conducting or current carrying electrode bridge material which is in contact with the gel strip in the electrode areas, the electrode means being adapted to be connected to a means for supplying an electric current for imposing an electric potential in the strip between the electrodes.

Existing apparatus for rehydrating IPG gel strips all have troughs with flat bases or floors. Indeed the provision of a flat floor in troughs for rehydrating IPG gel strips is taught as being necessary for satisfactory rehydration. In contrast the inventors of the present invention have realised that having a floor or base in which the dehydration area is delimited from the electrode area by for example having a stepped floor or a wall or both. In such a manner active rehydration can be carried out without the rehydration solution coming into contact with the electrodes, thus preventing the electrophoretic transport of the proteins to the electrodes in free solution. In a preferred embodiment a means of preventing the rehydration solution from contacting the electrodes include small walls extending across the width of the trough and a relatively small air gap between the electrodes and the walls.

In a further preferred embodiment the gel in the rehydration area of the trough contacts a conducting/current carrying, electrode bridge which completes the circuit to contact point of the electrodes.

5 The electrode bridges may comprise filter paper or the like wetted with an electrically conducting liquid.

It is preferred that the electrode area is deeper than the rehydration area.

Typically the tray will define a plurality of substantially parallel troughs.

10 The trays may be designed to allow electrodes to contact the gel/electrode bridge assembly from above, thus eliminating the need for embedded electrodes in the troughs.

This arrangement lends itself to a disposable IPG gel strip rehydration and running tray. The ability to use a disposable, combined IPG gel strip
15 rehydration and running tray overcomes a number of drawbacks with other commercially available systems.

The trays may be supplied with the dry IPG gel strips and dry electrode bridge material already in place in the grooves, thus eliminating the major handling step of setting up the trays. In addition, with disposable trays there
20 is no problem with carryover from one sample to the next, whereas the current commercial trays require careful washing between uses.

The electrode assembly may include moulded pressure points, which rest on the gel strip where it overlaps the electrode bridge to ensure a good electrical contact between the gel strip and the electrode bridge.

25 The invention also encompasses a method of rehydrating and performing electrophoresis on a gel strip using the apparatus according to the present invention and/or its preferred embodiments.

In a related aspect the invention provides a method of rehydrating and performing electrophoresis on a gel strip comprising the steps of:

- 30 (a) providing a tray defining at least one trough with a gel strip, located in said trough, the trough defining a centrally located rehydration area and an electrode area disposed either side of the electrode area in which an absorbent electrode bridge is provided, the trough including means for delimiting the rehydration area of the trough from the electrode area:
35 (b) wetting the bridges with an electrically conducting liquid;

- (c) adding rehydration liquid, containing a sample to be separated by electrophoresis to the trough;
- (d) inserting a dry gel strip into the trough if a gel strip is not already present in the trough, the gel strip being longer than the rehydration area so that its ends rest on the electrode bridges;
- (e) applying relatively low voltage across the gel strip the during a first period in which rehydration of the gel strip occurs;
- (f) subsequently applying a relatively higher voltage to perform electrophoresis on the sample.

Typically the sample will be a mixture of macromolecules such as proteins. although other samples containing DNA, RNA, amino acids or other components which can be separated by electrophoresis may be used.

Brief description of the Drawings

The invention will now be described, by way of example only, and with reference to the accompanying drawings in which:-

Figure 1 is a schematic view of an apparatus for active rehydration of IPG gels;

Figure 2a shows an enlarged view of an electrode bridge area of the apparatus of Figure 1;

Figure 2b is a schematic side view of walls which delimit a rehydration area of the apparatus;

Figure 3 illustrates an electrode assembly inserted into the electrode bridge area of the apparatus;

Figures 4 and 4a are schematic sectional views along the length of grooves of further embodiments of the invention; and

Figure 5 is an isometric view of a yet further embodiment of the invention.

Figure 6 shows a gel image where the rehydration liquid containing a sample has been loaded passively, ie while not subject to an electric current; and

Figure 7 shows a gel image where the rehydration liquid containing a sample has been loaded actively, while subject to an electric current.

Detailed Description of the Presently Preferred Embodiments

Turning now to the drawings, Figure 1 shows a first embodiment of an apparatus 10 for rehydrating dry IPG gels with the aid of an applied electric field. In the embodiment shown in Fig. 1 the tray has ten elongate parallel grooves or troughs 12. However the tray could have more or less than ten grooves. The grooves shown in Figure 1 are 6mm wide, however in other
5 embodiments the grooves they may be relatively narrower or relatively wider than 6mm.

Figure 2a shows an expanded view of one end of the tray in Figure 1 also shown schematically in Figure 2b. Each groove 12 has a base or floor 14 which is stepped at each end. Figure 2a shows only one end of each groove however both ends of each of the grooves are substantially identical. Each groove 12 defines a central rehydration area 16 at each longitudinal end of which there is a wall 18 which serves to contain the rehydration fluid within the designated rehydration area 18. The wall is about 1mm above the floor of
10 the rehydration area. There is an electrode bridge region 20 on the opposite side of each wall 18. The electrode bridge region is 1mm below the floor of the rehydration area. The electrode bridge area may typically be 20mm long and in use, as is discussed below, is sufficiently long to define an air gap 22 (Fig. 2b) between a piece of filter paper 23 or the like forming part of the
15 bridge and the wall 18 which retains the rehydration solution. This prevents capillary movement from the rehydration area onto the electrode bridge region 20. The dimensions given above are however exemplary only and might be varied.

The grooves which are typically 6mm wide allow room for loading the rehydration solution when an IPG gel strip is already in place in the groove, such as in the disposable tray format discussed above. Standard
25 commercially available IPG gel strips are 3.3mm wide, thus the 6mm wide grooves will also allow for the use of relatively wider non-standard IPG gel strips up to approximately 5mm wide.

The length of the grooves/trays may vary depending on the length of commercially available IPG gel strips which are to be used in the tray. Commercially available IPG gel strips are usually 7, 11, 13, 17 or 18cm long.
30

The rehydration area may be approximately 5mm shorter than the respective IPG gel strip to be rehydrated, to allow overlap of the IPG gel strip
35 29 (refer to Figure 2b) into the electrode bridge area. The length of the electrode bridge area is 20mm. In a preferred embodiment the electrode

bridge area contains a 6mm X 20mm piece of 2mm thick filter paper 23 which fills the electrode bridge area except for a small air gap 22. A piece of filter paper that size requires between 50 and 200 μ L of water to become slightly hydrated. The quantity of water in the electrode bridge area requires
5 precise control, to allow electrical contact without excessive wetness, which would cause a disturbance in the separation.

In other embodiments of the design the electrode bridge area and/or the rehydration area could be scaled up or down in size to accommodate different requirements.

10 Figure 3 shows an expanded view of one end of the tray in Figure 1 illustrating an external electrode assembly 24 being lowered into the electrode bridge areas of the grooves.

The external electrode assembly 24 consists of a series of pressure blocks 26 (which are dark grey in Figure 3) which rest/press on the IPG gel strip to ensure good contact between the IPG gel strip and the electrode
15 bridge material and an electrode itself 28 (which is shown in light grey in Figure 3). The electrode element comprises a series of electrode elements 30 located at the end of each pressure block which are integral with a joining element 32 linking the electrode elements together. The electrode elements are located near the outer edge of the trough to make full use of the length of
20 the electrode bridge material.

The apparatus of the present invention allows for active loading of a rehydration liquid containing a biological sample to be separated into the gel strip for electrophoresis, ie loading while the current is running. Further it
25 allows the use of filter paper or the like as an electrode bridge while the active loading is happening without getting the rehydration liquid onto the paper.

Figure 4a illustrates an alternative embodiment of the invention in which the base of the groove is curved along its length and in its centre,
30 measured along the longitudinal direction or length of the groove defines a laterally extending loading channel 42 having a depth of 0.5mm and a width w, measured in the longitudinal direction of the groove, of 2mm. The curved base allows the maximum depth of the groove at its longitudinal centre to be 2mm, so it can contain more rehydration liquid. The curved floor of the
35 rehydration area supports the IPG strip well. The height h of the end walls is 0.5mm.

Figure 4b shows a variant of the design of Figure 4a in which the floor of the rehydration area is flat and there are two sloping end sections 44 at the ends of the rehydration area which slope at about 30 degrees. The channel 42 is identical to that of Figure 4b.

5 Figure 5 illustrates a yet further variant of the invention in which two parallel walls 18 delimit the ends of the rehydration area 16 of the grooves. This helps to maintain an air gap between the rehydration solution and the electrode bridge area.

Comparative Example

10 Figure 6 shows a gel image where the rehydration liquid containing a sample of Human red blood cells has been loaded passively, ie while not subject to an electric current. The sample was prepared according to the method of Beutler. E., West, C., Blume, K-G., *J. Lab. Clin. Med.* 1976, **88**, 328-333. The membrane samples were then solubilised in a solution containing
15 7M urea, 2M thiourea, 1% C7Bz0 (a detergent) and 3mM tributyl phosphine. The solubilised protein was then loaded (passively) onto the dry IPG strip by rehydration in the case of the example shown in Figure 6 without active rehydration.

Example

20 Figure 7 shows a gel image where the rehydration liquid containing a sample of Human red blood cells prepared according to the example set out above has been loaded actively, while subject to low voltage of about 50 volts. As can be seen in comparison with the gel shown in Figure 6 the final gel strip shown in Figure 7 is better than the passively loaded strip because
25 there are more distinct protein spots resolved. Also the large amount of smearing which is apparent in figure 6 is not present on Figure 7. Further high molecular weight proteins are better resolved on the active gel. It is possible to identify "spectrin" (50) a very large 250kDa protein on the gel of Figure 7. Spectrin is a signature protein of RBC membranes and is very
30 difficult to resolve.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the
35 invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

CLAIMS:

1. An apparatus for rehydrating and for performing electrophoresis on a gel strip including:-
- (a) a tray defining at least one trough configured to receive a gel strip, said trough defining a centrally located rehydration area and an electrode area disposed either side of the rehydration area;
- (b) means for delimiting the rehydration area of the trough from the electrode area: and
- (c) electrode means including contact points adapted to contact either the gel strip in the electrode areas near the first and second end of the gel strip or a conducting or current carrying electrode bridge material which is in contact with the gel strip in the electrode areas, the electrode means being adapted to be connected to a means for supplying an electric current for imposing an electric potential in the strip between the electrodes.
2. An apparatus as claimed in any preceding claim wherein the means for delimiting the rehydration area of the trough from the electrode area include walls extending laterally across the width of the trough and an air gap defined between each electrode means and the wall adjacent said electrode means.
3. An apparatus as claimed in any preceding claim wherein two spaced apart parallel walls extend across the trough defining a gap there between
4. An apparatus as claimed in claim 2 or 3 wherein a part of the gel strip in the rehydration area of the trough adjacent the delimiting wall contacts a conducting/current carrying, electrode bridge.
5. An apparatus as claimed in claim 4 wherein the electrode bridges comprise an absorbent material wetted with an electrically conducting liquid.
6. An apparatus as claimed in claim 5 wherein the absorbent material is paper.
7. An apparatus as claimed in any preceding claim wherein the electrode area is deeper than the rehydration area.
8. An apparatus as claimed in any preceding claim wherein a laterally extending channel is defined in a floor of the groove.
9. An apparatus as claimed in any preceding claim wherein the trough does not include embedded electrodes and the electrodes contact the electrode bridge material from above.

10. An apparatus as claimed in any one of claims 1 to 8 wherein the tray includes a dry IPG gel strip and dry electrode bridge material located in place in the trough.

11. An apparatus as claimed in any preceding claim further including
5 pressure applying means which rest on the gel strip where the strip overlaps the electrode bridge material to ensure a good electrical contact between the gel strip and the electrode bridge material.

12. An apparatus as claimed in any preceding claim wherein the tray defines a plurality of substantially parallel troughs.

10 13. A method of rehydrating and performing electrophoresis on a gel strip using the apparatus according to the any of the preceding claims.

14. A method of rehydrating and performing electrophoresis on a gel strip comprising the steps of:

- 15 (a) providing a tray defining at least one trough with a gel strip, located in said trough, the trough defining a centrally located rehydration area and an electrode area disposed either side of the electrode area in which an absorbent electrode bridge is provided, the trough including means for delimiting the rehydration area of the trough from the electrode area;
- 20 (b) wetting the bridges with an electrically conducting liquid;
- (c) adding rehydration liquid, containing a sample to be separated by electrophoresis into the centrally located rehydration area of the trough;
- (d) inserting a dry gel strip into the trough if a gel strip is not already present in the trough. the gel strip being longer than the rehydration area so that its ends rest on the electrode bridges;
- 25 (e) applying relatively low voltage across the gel strip the during a first period in which rehydration of the gel strip occurs;
- (f) subsequently applying a relatively higher voltage to perform electrophoresis on the sample.

15 30 15. The method of claim 14 wherein the sample is a mixture of macromolecules selected from the group consisting of protein samples containing DNA. RNA. amino acids or other components which can be separated by electrophoresis may be used.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20315 A1

(51) International Patent Classification?: G01N 27/447,
27/453, B01D 57/02

(21) International Application Number: PCT/AU00/01065

(22) International Filing Date:
8 September 2000 (08.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 2760 10 September 1999 (10.09.1999) AU

(71) Applicant (for all designated States except US): PRO-
TEOME SYSTEMS LTD. [AU/AU]; Unit 1, 35-41 Wa-
terloo Road, North Ryde, NSW 2113 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HERBERT, Ben
[AU/AU]; 25 Marcella Street, North Epping, NSW 2121
(AU).



(74) Agent: F.B. RICE & CO.; 605 Darling Street, Balmain,
NSW 2041 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: ELECTROPHORESIS APPARATUS AND A METHOD OF USING THE SAME

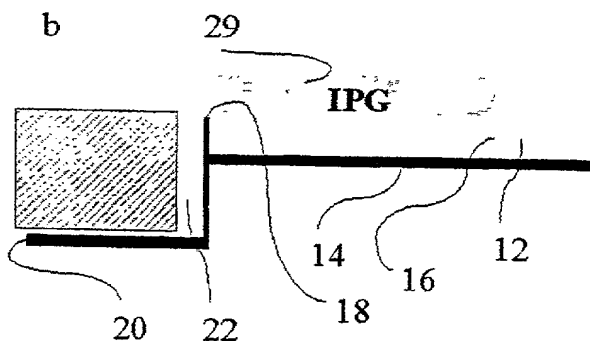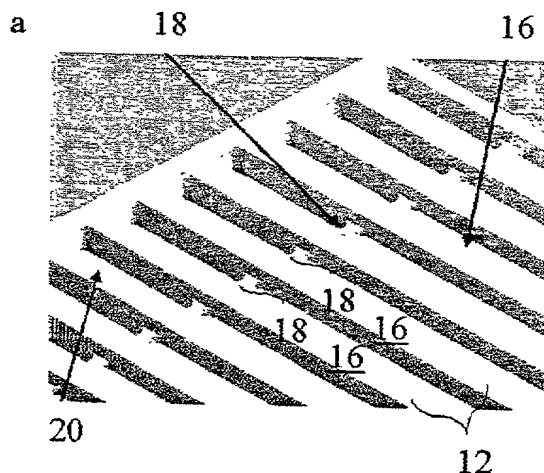

(57) Abstract: An apparatus for rehydrating and for per-
forming electrophoresis on a gel strip includes a tray defin-
ing a plurality of parallel troughs configured to receive gel
strips. Each trough defines a centrally located rehydration
area and an electrode area disposed either side of the elec-
trode area. End walls delimit the rehydration area of the
trough from the electrode area. Electrode means including
contact points adapted to contact either the gel strip in the
electrode areas near the first and second end of the gel or
a conducting or current carrying electrode bridge material
which is in contact with the gel strip in the electrode areas.
The electrode means are adapted to be connected to a means
for supplying an electric current for imposing an electric po-
tential in the strip between the electrodes.

20000908 41602001

WO 01/20315 A1

1/7

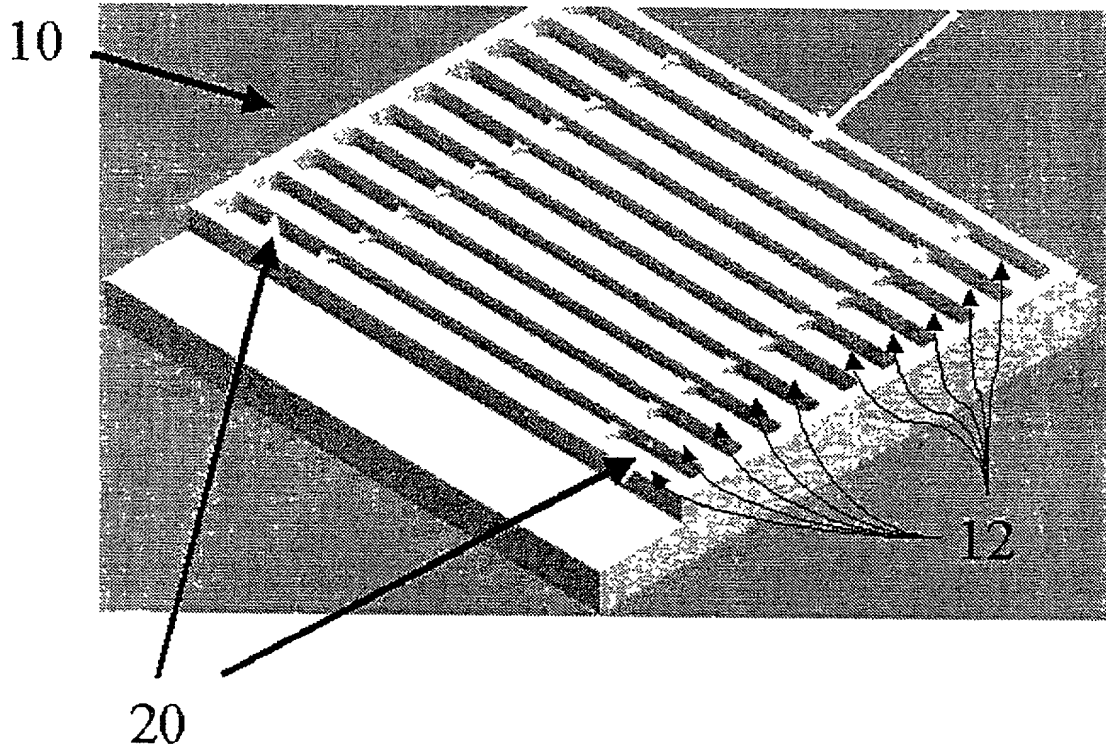


Figure 1

2/7

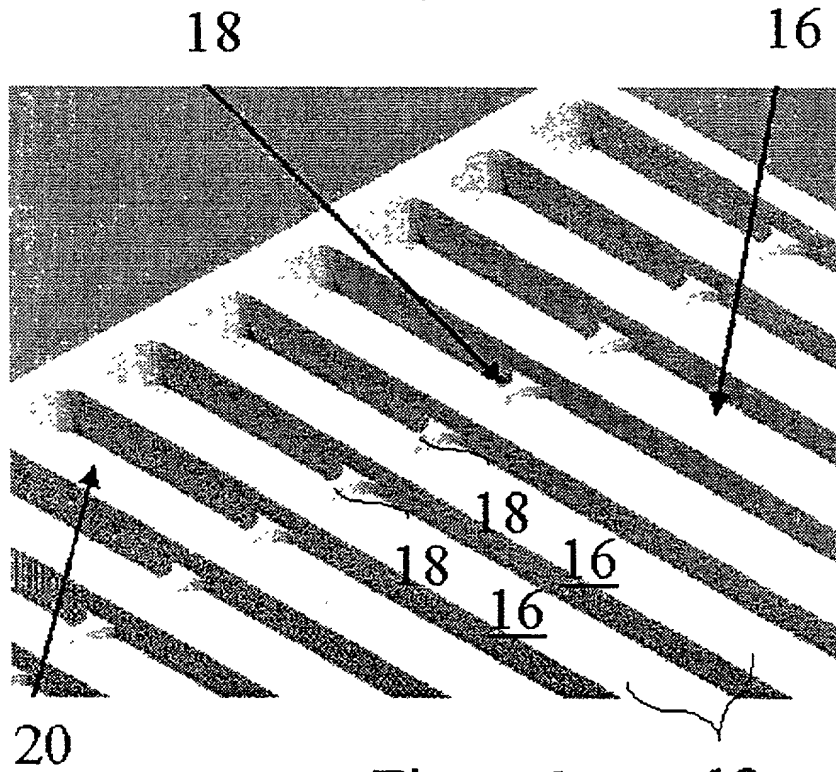


Figure 2a

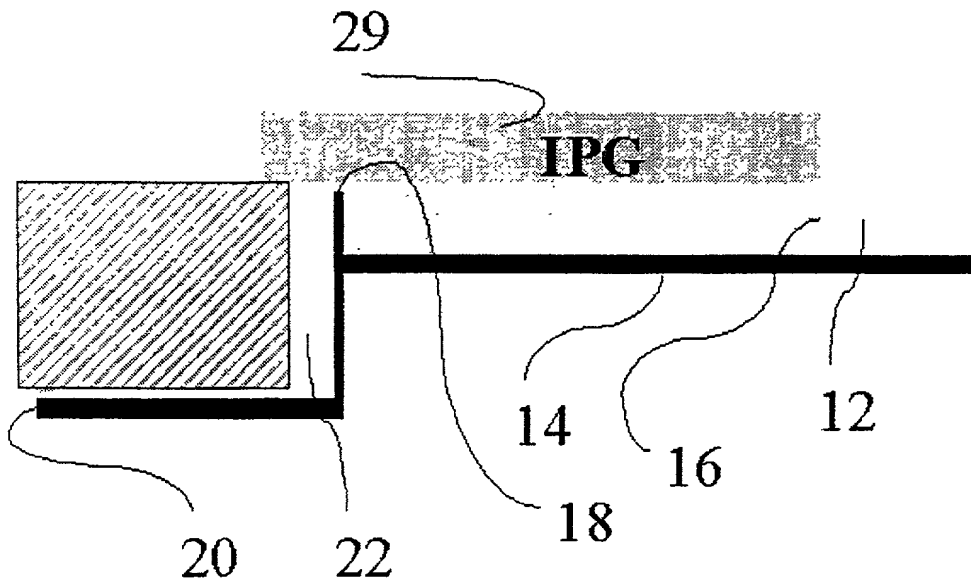
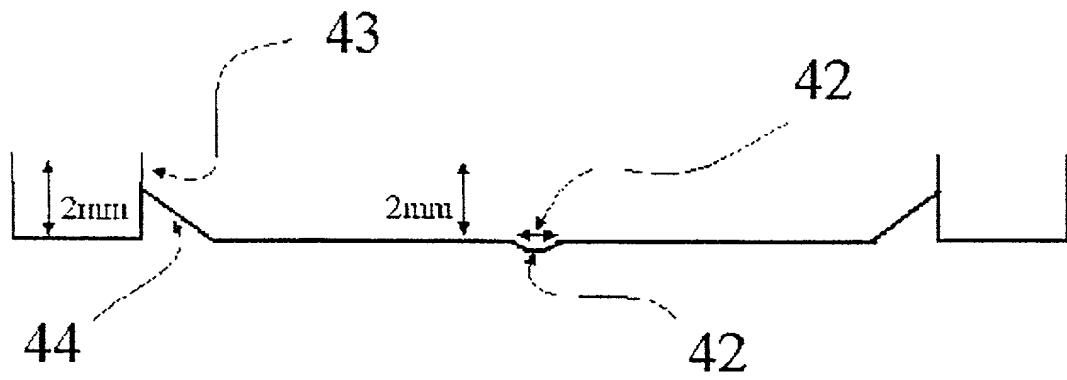
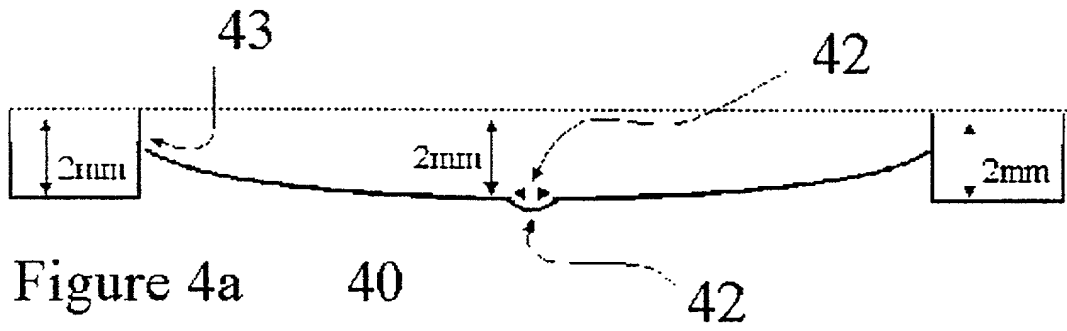


Figure 2b

10070914-000002

4/7



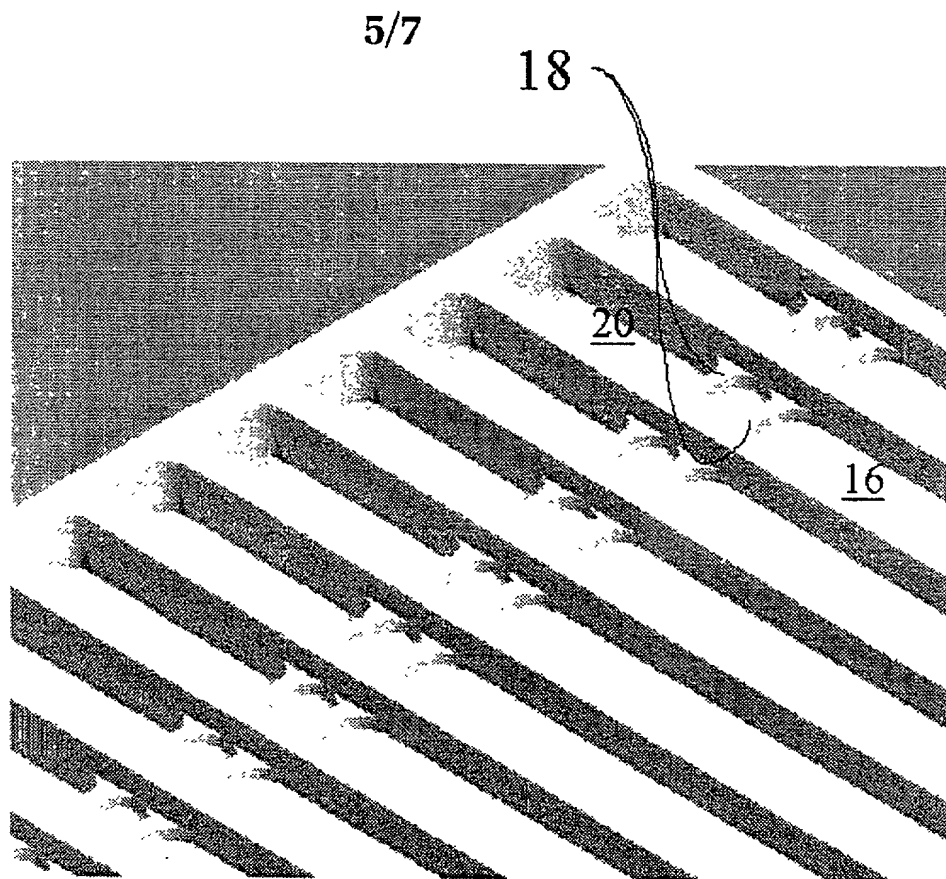


Figure 5

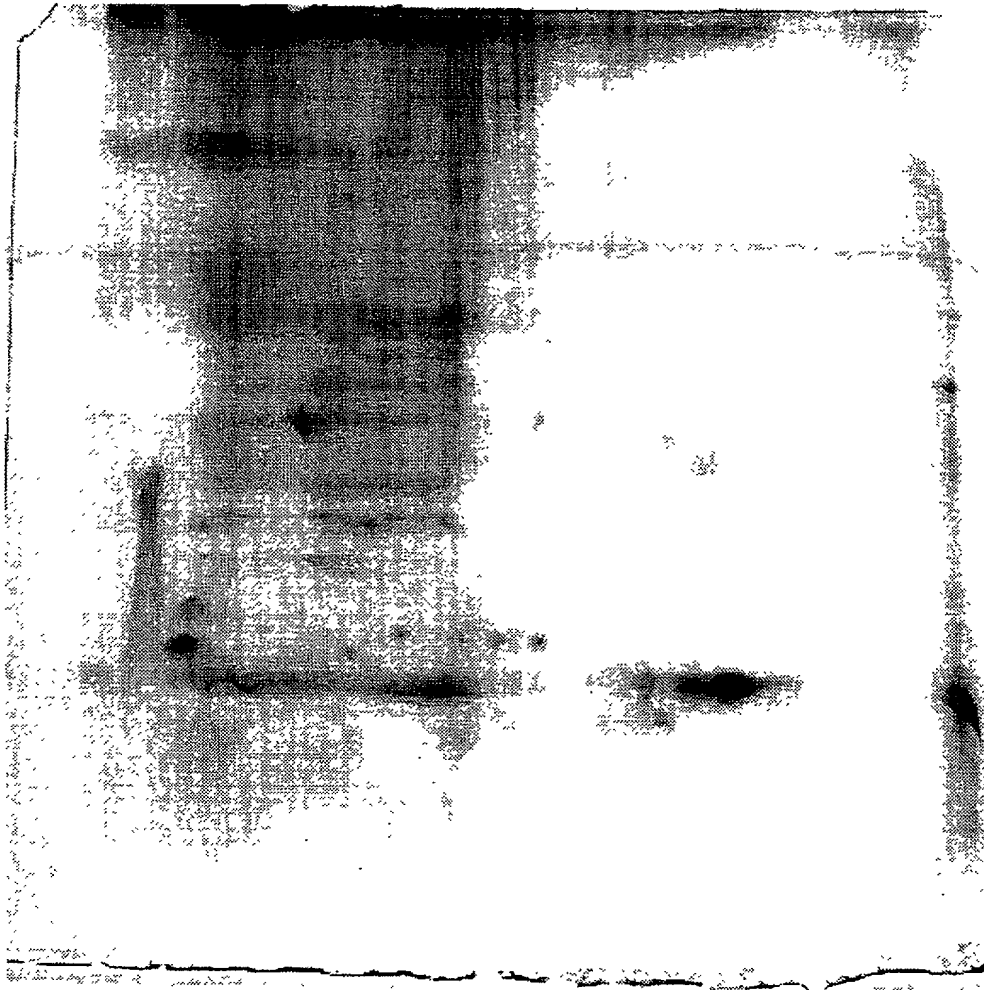


Figure 6

7/7

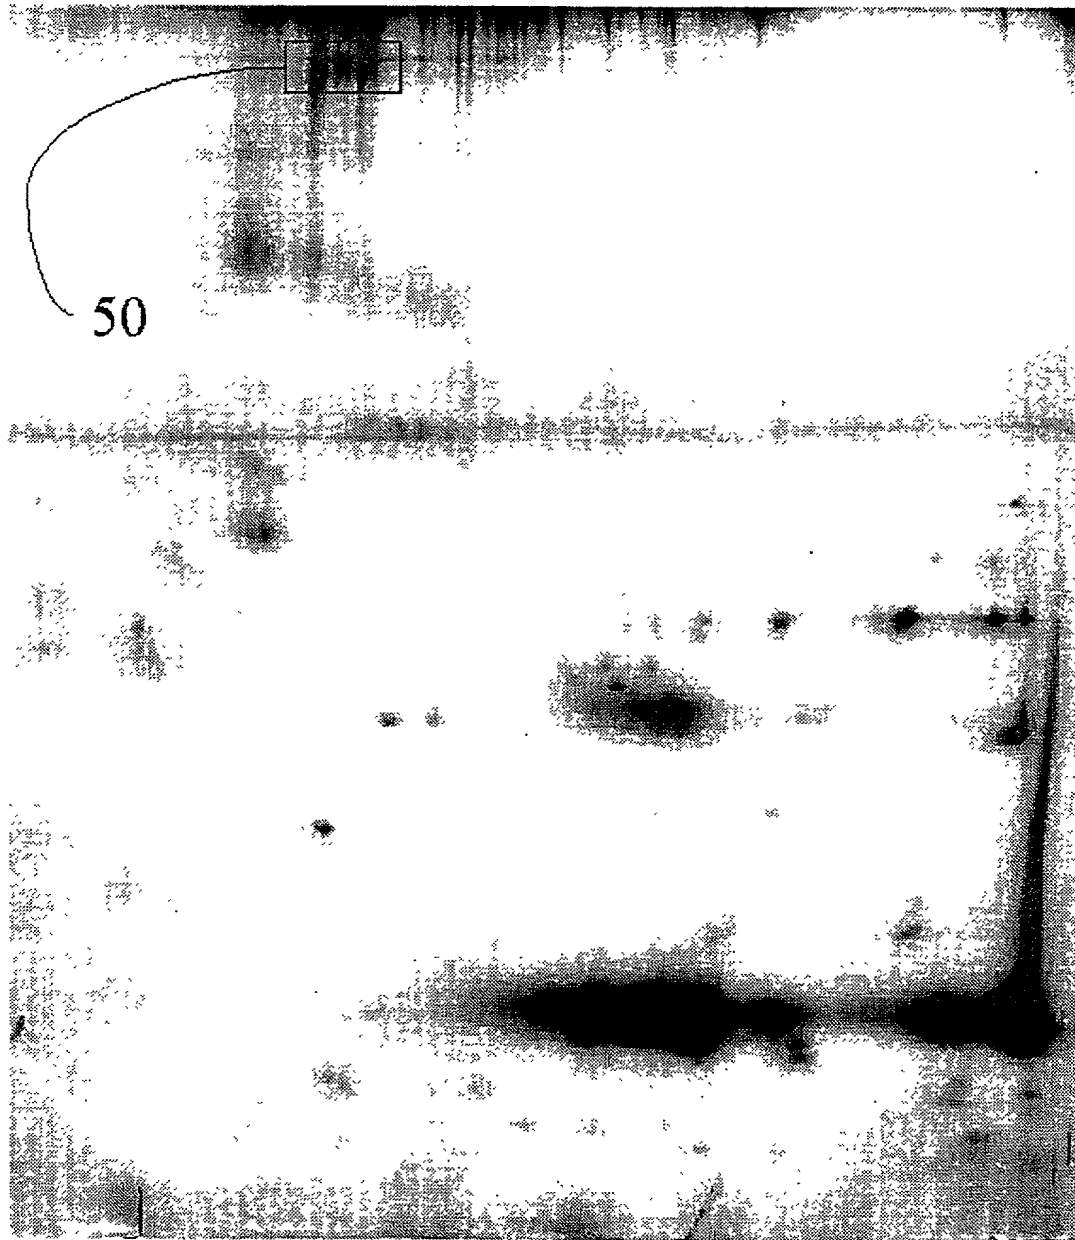


Figure 7

DECLARATION AND POWER OF ATTORNEY - USA PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Electrophoresis apparatus and method of using the same

the specification of which:

- (a) ☐ is attached hereto; or
- (b) ☐ was filed on _____ as Application No. 0 / _____ or Express Mail No., as Application No. not yet known _____ and was amended on _____ (if applicable); or
- (c) ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (if any) and/or under PCT Article 34 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56;

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent, design or inventor's certificate or any PCT international application(s) listed below and have also identified below any foreign application(s) for patent, design or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed for the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 U.S.C. § 119	
PCT	PCT/AU00/01065	8 September 2000	<input checked="" type="radio"/> YES	NO <input type="radio"/>
			<input type="radio"/> YES	NO <input type="radio"/>
			<input type="radio"/> YES	NO <input type="radio"/>
			<input type="radio"/> YES	NO <input type="radio"/>
			<input type="radio"/> YES	NO <input type="radio"/>

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

20000914T60200T

Prior U.S.A. Application(s)

Application No.: _____ Filing Date: _____ Status: _____

POWER OF ATTORNEY: I hereby appoint the registrants of Knobbe, Martens, Olson & Bear, LLP, 620 Newport Center Drive, Sixteenth Floor, Newport Beach, California 92660, Telephone (949) 760-0404, Customer No. 20,995.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Ben HERBERTInventor's signature [Signature] Day 26 Month February Year 2002Residence (city and country): at 3 Douglas Avenue, North Epping, NSW, 2121, AUSTRALIA AUXCitizenship: AustralianPost Office Address: at 3 Douglas Avenue, North Epping, NSW, 2121, AUSTRALIA

Full name of second inventor: _____

Inventor's signature _____ Day _____ Month _____ Year _____

Residence (city and country): _____

Citizenship: _____

Post Office Address: _____

Full name of third inventor: _____

Inventor's signature _____ Day _____ Month _____ Year _____

Residence (city and country): _____

Citizenship: _____

Post Office Address: _____

Send Correspondence To:
KNOBBE, MARTENS, OLSON & BEAR, LLP
Customer No. 20,995